

Area of application: Indoor rooms with "normal" humidity

Important: Leave at least 60 cm distance between LoRa and mobile radio antenna

QUICK GUIDE

Router für JERRY WiFi



1. WiFi antenna

Screw the black, cylindrical WiFi antenna to the "WiFi" contact on the back. Position as vertically as possible.

2. Mobile-antennas

Screw two black mobile phone antennas to the "MOBILE" contact. Position as vertically as possible.

3. Power supply unit

Connect the power supply unit to the router.




4. Power supply

Connect to a socket outlet with a permanent power supply.

5. Attach stickers

Sticker warns against unplugging the router.

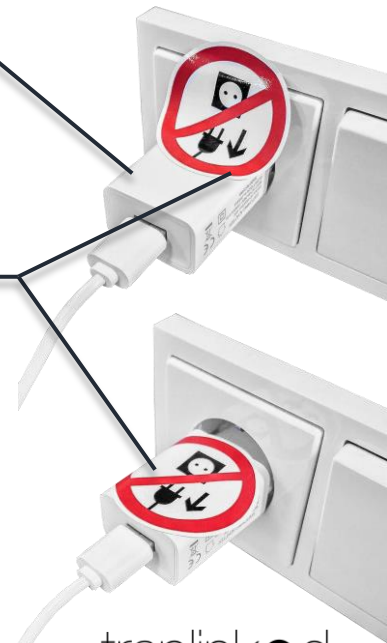

Operational readiness:

Grüne Netzwerk-LED leuchten durchgängig und zeigen mindestens 3 Striche an.

ROUTER POSITIONIERUNG


1. High

The aim is to install as high as possible and to have few obstacles between the trap and the router. If necessary, have the customer set up a permanent power socket in an ideal location.



2. Central

Set up as centrally as possible in the object. If the highest point is not in the middle of the object, prioritize height.

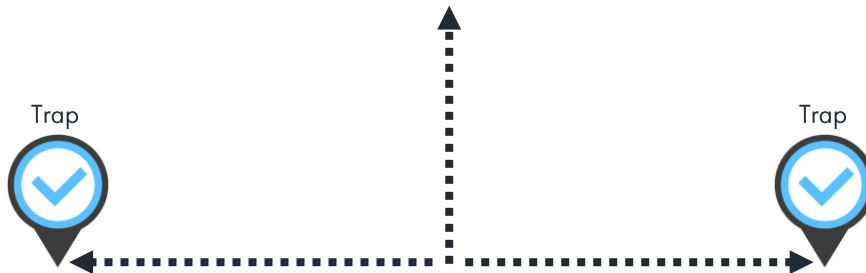

CHECK NETWORK


1. Connect to the "digitaltraps" network via smartphone

Search for and connect to the "digitaltraps" network in your smartphone's Wi-Fi settings.

Note: Your individual password can be found on the back of the router.

2. Check network connection at checkpoints

Also check at the checkpoints whether there is WLAN reception for at least 2 out of 3 bars.

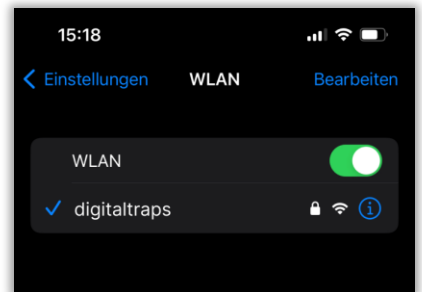

3. Optional: Use a WiFi repeater if network coverage is weak

If the WiFi reception is too weak at checkpoints, you should use one (or more) WiFi repeaters. The location where the repeater is placed must have at least 2 out of 3 bars of WiFi reception.

More information &
instructions:
traplinked.com/manual



Technical help &
support:
traplinked.com/support



+49 911 477 567 65
support@traplinked.com