traplinked
innovating pest control

Jerry 3 Bait Quick Guide


PART 1 OF 2
Hardware

PREREQUISITE

LoRa gateway is online and the LoRa signal at the installation site is sufficient. Check before commissioning.

1 Set bait pad — white adjusting screw

At which **remaining weight** of the bait do you want to be notified?

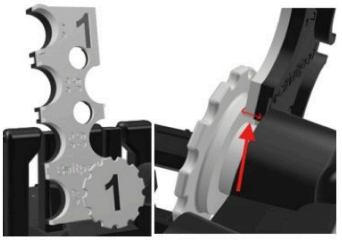


> ! **Set the remaining weight, not the bait weight.** The screw determines how little bait may be left before you receive a notification.

PRESET 40 G

Unscrew → Place → Screw on

2 Set activity pad — black adjusting screw


At which **weight** should the activity pad trigger?

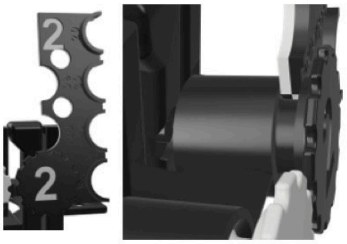

PRESET 40 G


Unscrew → Place → Screw on

3 Place or fill in the bait

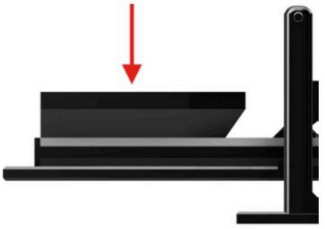

4 Switch on the Jerry module

Flip the switch in the module housing.

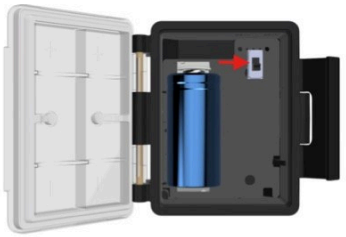

5 Place the box including Jerry Bait at the installation site

1 Open the traplinked app

2 Select or scan the serial number

Move the trap in the floor plan and check the online status.


3 Set remaining bait weight — calibration

= Same value as on the white adjusting screw on the bait pad (step 1, page 1).



4 Set activity threshold

After how many **activities** in which period do you want to be notified?

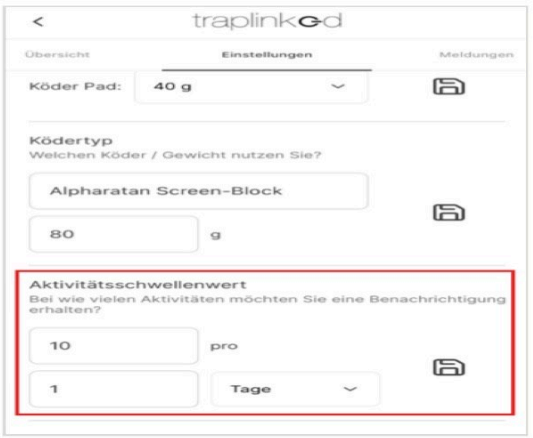

RADIO TECHNOLOGY

RADIO TECHNOLOGY	FREQUENCY BAND	MAX. TRANSMIT POWER
LoRa (LoRaWAN EU868)	863–870 MHz	14 dBm e.r.p. (25 mW)
Bluetooth LE / WLAN	2400–2483.5 MHz	20 dBm e.i.r.p. (100 mW)

SIMPLIFIED EU DECLARATION OF CONFORMITY

Hereby, traplinked GmbH declares that the radio equipment type JERRY 3 is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:
www.traplinked.com/anleitung

MANUFACTURER

traplinked GmbH · Zollhof 7
90443 Nürnberg · Germany

As of 09.10.2026

QUESTIONS & SUPPORT

support@traplinked.com
+49 911 477 567 65

INTRODUCTORY VIDEO

Scan the code to watch the commissioning in the video.